

# HY-NT10/60GDF

LID

PID

80-85%

线





**STC :** 1000W/m<sup>2</sup> 25 =1.5

(Pmpp/Wp)	495	500	505	510	515
(Vmpp/V)	36.37	36.55	36.73	36.91	37.08
(mpp/A)	13.61	13.68	13.75	13.82	13.89
(Voc/V)	43.52	43.72	43.92	44.12	44.32
(Isc/A)	14.35	14.42	14.49	14.56	14.63
	22.4%	22.6%	22.8%	23.0%	23.3%

**NMOT :** 800W/m<sup>2</sup> 20 =1.5 1m/s

(Pmpp/Wp)	371.7	375.2	378.8	382.4	386.3
(Vmpp/V)	34.13	34.30	34.47	34.64	34.80
(mpp/A)	10.89	10.94	10.99	11.04	11.10
(Voc/V)	41.01	41.20	41.39	41.58	41.77
(Isc/A)	11.51	11.57	11.63	11.69	11.75

**Performance Parameters**

	Pmpp/Wp	Vmpp/V	Impp/A	Voc/V	Isc/A
5%	525	36.55	14.36	43.72	15.14
15%	575	36.55	15.73	43.72	16.58
25%	625	36.55	17.10	43.72	18.03


**Temperature Coefficients**

(Pmpp)	-0.29%/
(Isc)	+0.043%/
(Voc)	-0.24%/
(NMOT)	42 °C

**Environmental Protection**

(IEC)	1500Vdc
	3
	IP 68
	30 A
	-40~+85°C
	80±5%

**Product Dimensions and Specifications**

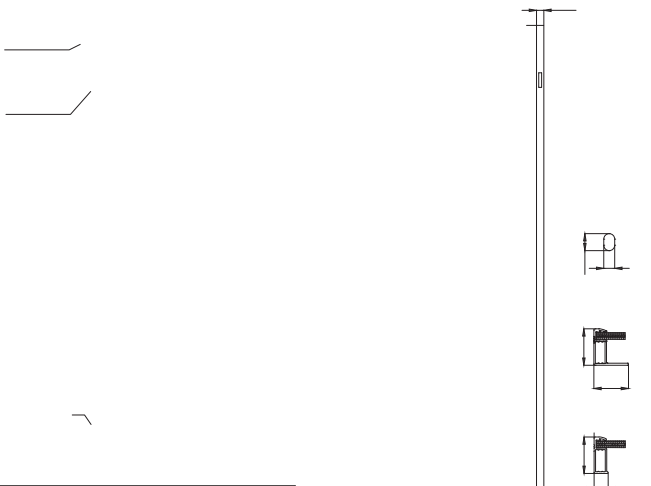

( x x )	1952 x 1134 x 30 mm
	N
	120 (6*20)
	/
	2.0+2.0 mm
	: (+) 300 mm (-) 300 mm
(IEC)	4 mm <sup>2</sup> / 12 AWG
	5400 Pa ( ) / 2400 Pa ( )
(IEC)	PV-HYC11xyz( ) / MC4 EVO2( )
	26.5 kg
	36 /
	1003 kg
	(17.5m ) 1152 /